




Cylinder Non-Tapered Smooth

IPCYL0810S-FG FRP-PolyComp™



Optional Cuts

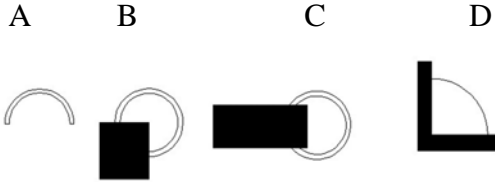

- A= Half column
- B = 3/4 Outside Corner
- C = Wall Cover Engaged
- D = 1/4 Column Inside Corner
- E = Engaged any percentage

Top of Shaft
Minimum
Inside Diameter
8-3/4" (22.2cm)

Outside Diameter
9-3/4" (27.7cm)

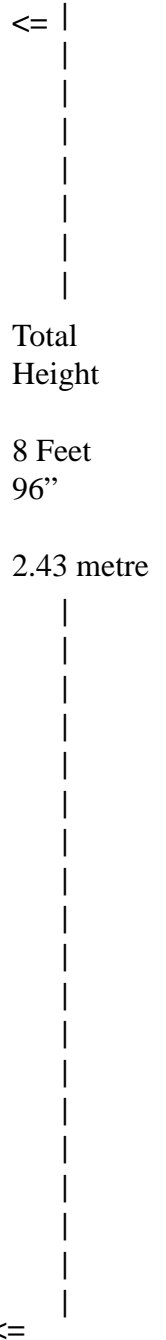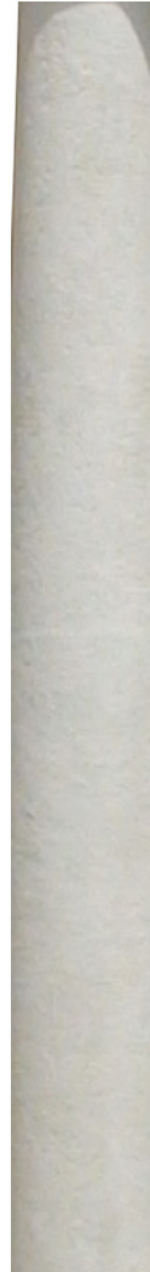

Bottom of Column
Outside Diameter
9-3/4"
27.7cm

Shaft weight 100 lbs (45.3kg)
Center Loads to 14,000lbs (6.35m tons)

* *assembly required, drawing not to scale*
 * *For Load Application check with your structural engineer for suitability in your local area*
 * All specifications subject to change without notice, Final products & Measurements may vary from this brochure





REQUEST FOR COLUMN QUOTE

Download and Auto Fill

Name / Company _____

Contact Name: _____

Phone # _____ Email: _____

Bill To Address

ShipTo Address

ZIP/PC _____

ZIP/PC _____

Product Code _____


- 1) Residential
 - 2) Commercial
 - 3) Commercial Load Bay
- Fill in _____

of Columns Whole _____

Split for Wrap (A) _____

Split for Engaged (A) _____

Notes: _____

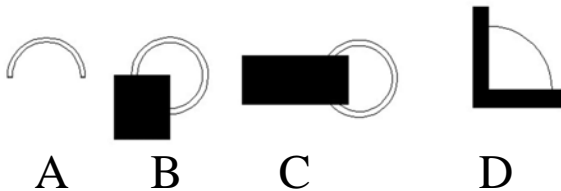

Split B _____

Split C _____

Split D _____

Date: _____



Imperial Productions®

1-800-399-7585

Imperial Productions & Distribution Inc.

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved